


The Executive™ Series Waist-High

Motorized Barrier Optical ADA Swing Gate | Interior Application

EX300-RM-ADA
EX300-RM-S





The Executive™ Series is our premier interior application unit. It is ideal for prestige settings such as banks, offices, embassies, and museums. This highly versatile line can take on any look. It features our signature 304 stainless steel/No. 4 satin finish with a solid surface top to match your design needs.

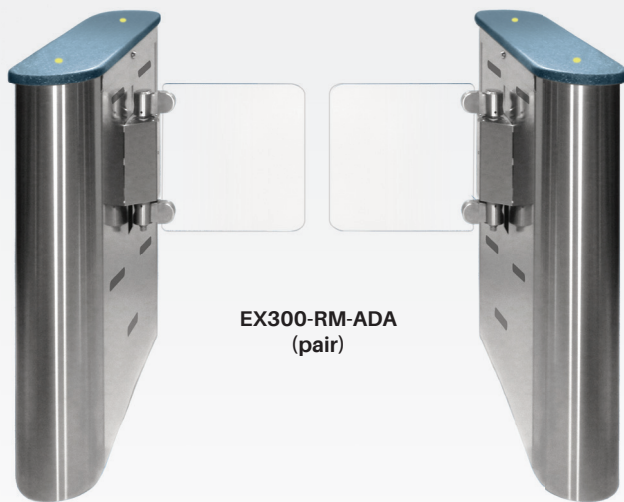

EX300-RM-ADA
(pair)



Optional wood tops and laser etched paddles available

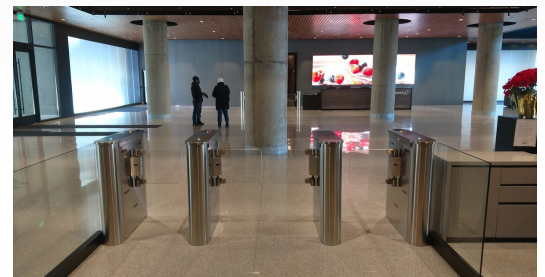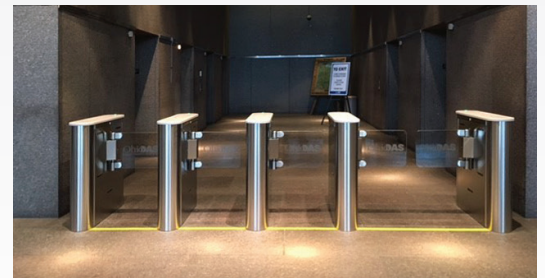

EX300-RM-S
(single)

EX300-RM-ADA
(pair)

(Sample Array)

EX300-RM-S
(single)

We're the #1 Choice of Top Architects, Security Pros and Engineers

For more than 30 years, Controlled Access has been the globally trusted name in pedestrian control equipment. Made in Ohio and shipped worldwide, we are the first choice of leading architects, facility managers, security consultants, and engineers. Whether your project requires high security full-height turnstiles, waist high units, or matching ADA accessible gates, Controlled Access is the secure choice. We're experienced in access control systems, from card readers to biometric scanning, to give you the power to control access.



Optional wood top upgrade shown with lights

Standard top selections include:



* Subject to availability

The Executive™ Series Waist-High

Motorized Barrier Optical ADA Swing Gate | Interior Application

EX300-RM-ADA
EX300-RM-S



Product Overview:

The EX300 is a fusion of optical technology with secure automation while maintaining our signature 304 stainless steel/No. 4 satin finish. When access is granted, the polycarbonate arms swing open in sync to allow entry while optical sensors confirm passage and close the lane accordingly. Unauthorized passage (such as "tail gating" or attempting to cross through the lane in the wrong direction) will engage its alarm, which can be integrated to any number of internal security systems. The EX300-RM-ADA is sold as a pair, with additional single lanes available (EX300-RM-S).

Product Features:

Materials and Finishes:

- **Lid:** A solid surface (or wood) top with your choice of 12 standard colors selections. Custom colors and Corian™ can be quoted
- **Cabinet:** Our signature 304 stainless steel/ No. 4 satin finish

Design & Construction:

- Designed for secure and reliable operation with aesthetics in mind
- Cabinet constructed of 304 stainless steel/ No. 4 satin finish
- Triple strand chain drive with adjustable chain tensioners
- Minimal exposed hardware

Options:

- Bi-directional key overrides (fail open only)
- 8 digit key resettable LCD counter with seven year lithium battery
- ADA push to exit placard button
- Laser Etching of your logo/artwork into the paddles
- Corian™, wooden or other alternate top choices outside of our standard selection
- **NEW!** Stainless steel round end tops now available
- Additional options available upon request

Dimensions:

- **Height:** 38.925" (988.7mm)
- **Width:** 58.875" (1495.4mm)
- **Depth:** 36.750" (933.4mm)
- **Passage Way:** 36" (914.4mm)


* Dimensions are subject to change without notice

Optical Features:


- Powerful through beam sensors which exceed sensing distance to ensure proper functionality
- Optical sensors to prevent unauthorized "crawling" thru lane
- Can be configured for controlled passage in one or both directions, with free or no passage in the other via settings on the logic controller
- Tri-color indicator lights (yellow/red/green) are recessed in the primary lid to direct users through lane
- Alarm condition provides audible tone as well as solid state output for integration into other systems
- Dual-axis sensor alignment with visible target to ensure a simplified and reliable installation
- Nearly universal integration to any number of access control systems

Mechanical Features:

- Arms driven by variable speed motors and feather touch clutches provide automation while remaining safe
- Arms securely lock in home position via our 6500 Series Control Head, featuring:
 - Hardened tool steel locking bars, cam and roller assemblies
 - Permanently lubricated bearings
 - Your choice on each electronic direction of locking or unlocking on power failure

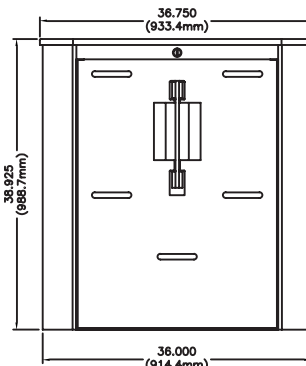

See our website for additional layout options

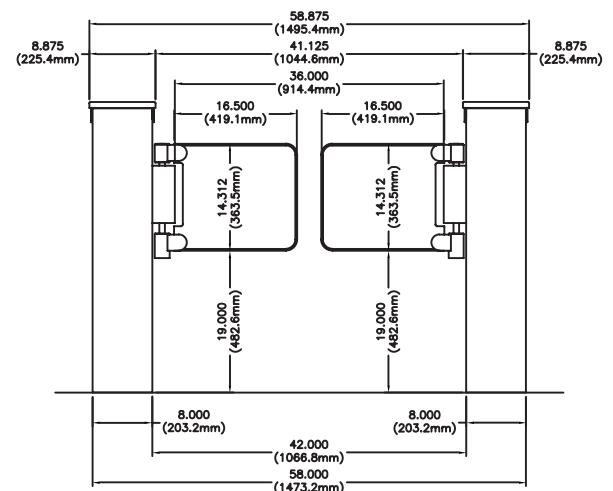

* Dimensions are approximate

Warranty:

Units are warranted against defects in materials and workmanship for a period of one year from date of delivery. See warranty information for specific details.

Electrical Specifications:

Input Voltage: 100-240 VAC
 Operating Voltage: 24VDC
 Direction Inputs: Contact Closure (Normally Open, Dry)

Standards and Codes:

Austenitic stainless steel:
 ASTM A240, A249, A276
 All fasteners provided meet IFI ANSI/ ASME Fastener Standards
 American Welding Society (AWS) Standard D 1.1



Controlled Access, Inc. is certified by Advantage International Registrar to be an ISO 9001:2015 company